




MELTRADE 170 CC TRADING AS SUPPLY FIVE
REG NO: 2004/094971/23
MEMBERS: RT DU TOIT, MJ PREEN
QCK PARK, VAN ECK STREET, BELLVILLE
PO BOX 26910, HOUT BAY, 7872
EMAIL: ADMIN @SUPPLY5.CO.ZA
TEL: +27 (0) 9512055/6
FAX: +27 (0) 9512058

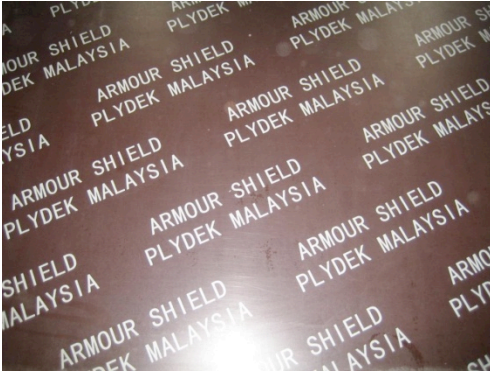

ARMOUR SHEILD PLYDEK (FILMFACE SHUTTERING PLYWOOD)

Raw Materials:

Film: 120 gsm Phenolic Film (Brown)

Core Veneer: Poplar

Glue: MUF (Melamine Glue) Cold Water resistant

Size & Thickness:

Size: 1220 x 2440 (mm)

1250 x 2500 (mm)

Thickness: 18mm and 21mm

Technical Specification:

Armour Sheild Film Faced Shuttering plywood is cost effective and Super Finisher. In total it saves over 40 percent in finishing costs.

Selected naturally and durable cross band poplar veneers impregnated with Melamine Resin and then finally topped with Phenolic film at a very high pressure to give it a mirror finish look.

Special properties:

High Strength

Stability

Superior resistance

Multiple reuses.